


Swisspearl Berona Stonedge

Roofing

The Swisspearl group has been manufacturing and developing fibre cement products including slates for over 90 years. Swisspearl slates are lightweight roof tiles that offer distinctive aesthetics ideal for both roof and facade. The slates are easy to handle and install which make them ideal for all types of projects.

Swisspearl prides itself on manufacturing fibre cement slates which achieve the highest approvals from local, national and international agencies in the fields of product quality and sustainability. The Swisspearl range of Berona slates carry the CE mark and are manufactured in accordance with the requirements of the European Norm EN 492. They have achieved Class B, the highest class, for structural stability in accordance with EN 492.

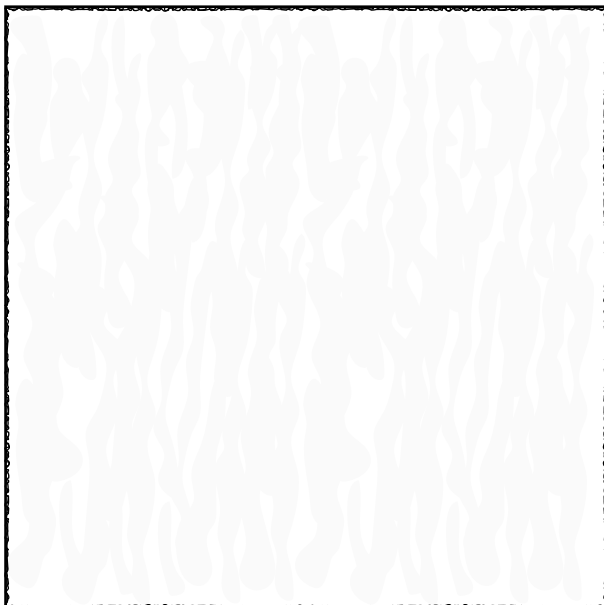

600 mm

The slates are manufactured using Portland cement together with a non-asbestos formulation of superior blended synthetic and cellulose fibres. The slates are pigmented during production and are fully compressed. They are finished with a high quality, semi-matt acrylic coloured coating to the top face and edges and a tinted or transparent, high performance binder to the back face. Swisspearl slates are complemented by a wide range of fibre cement accessories.

Swisspearl slates are manufactured in accordance with a quality assurance system to ISO 9001. Furthermore, our production unit complies with the requirements of ISO 14001: 2004. Swisspearl slates are manufactured in accordance with the requirements of ISO 14001:2004. Environmental Product Declaration number EPD-CEM-2012211.

SWISSPEARL BERONA STONEDGE

Swisspearl Berona Stonedge are rectangular with a smooth surface and dressed edges. These slates are finished with a semi-matt acrylic Blue-Black or Welsh Blue coloured coating and carry an extended colour warranty. Swisspearl Berona Stonedge offers an economic alternative to natural roofing materials.

600 mm

Swisspearl Berona Stonedge

Dimension		
Width	mm	600
Length	mm	600
Thickness	mm	4.0

Physical properties		
Density, dry (EN 492)	Kg/m ³	1700
Weight	Kg/pcs.	1.5

Mechanical properties		
Class (EN 492)		B
Bending moment min (EN 492)	Nm/m	50

Thermal properties		
Coefficient of thermal expansion (EN 492)	mm/m °C	0.008

Tolerances		
Thickness	mm	+1/-0.4
Length	mm	±3.0
Width	mm	±3.0

Other properties		
Fire rating (EN 13501)		A2,S1-d0
Fire category		B _{roof}
Minimum pitch		24